

**CONNECTOR LEMO® PCA, FFA**

**Application**


LEMO® FFA/PCA connectors with push-pull assembly mechanism. Connectors have high-quality workmanship and high resistant for disadvantageous working conditions.

**Technical data**

- High-quality nickel-plated brass resistant up to +200°C
- Push-Pull mechanism
- Wires connected by soldering
- Solid construction
- Max cable diameter: Ø8 mm
- Maximum cable diameter up to Ø8 mm (depends on LEMO® connector size)

**PCA S Series**

Series	A	C	H	⚙ S2
0S	8.9	4.2	33.5	6.5
1S	11.9	6.2	40.5	8.5
2S	14.8	8.5	50.0	11.0
3S	17.8		59.0	14.0

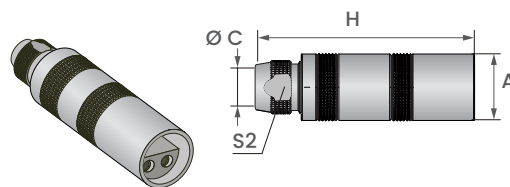


**PCA**

Lemo socket connector

**FFA S Series**

Series	A	C	H	⚙ S2	M
0S	9.0	4.2	34.5	6.5	24.5
1S	12.0	6.2	42.5	8.5	31.5
2S	14.8	8.5	52.0	11.0	40.0
3S	17.8		61.0	14.0	46.0

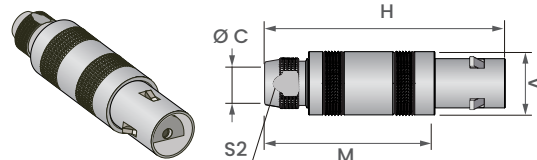

**FFA**

Lemo plug connector

**Order code**

Lemo -  <sup>1</sup> -  <sup>2</sup> -  <sup>3</sup>

Connector type	
1 <input type="text"/>	PCA socket
	FFA plug

Connector type	
2 <input type="text"/>	0S dimension 0S
	1S dimension 1S
	2S dimension 2S

Pins amount	
3 <input type="text"/>	2 2-pin
	3 3-pin
	4 4-pin
	6 6-pin

Order code example: Connector LEMO PCA-1S-2 ( socket LEMO PCA, dimension 1S, 2-pin )  
 Connector LEMO FFA-1S-4 ( plug LEMO FFA, dimension 1S, 4-pin )

