

**HART 7 temperature converter - isolated**

**3113**

- High accuracy, better than 0.05% of span
- Slimline housing of 6.1 mm
- Excellent EMC performance
- Selectable 60 ms / 60 s response time
- Pre-calibrated temperature ranges selectable via DIP-switches



**Application**

- The 3113 temperature converter measures a standard Pt100, TC J and K temperature sensor, and provides an isolated active analog current and HART signal output.
- High 3 port isolation provides surge suppression and protects the control system from transients and noise.
- The 3113 can be mounted in the safe area or in Zone 2 / Division 2 areas.
- Approved for marine applications.


**Technical characteristics**

- Flexibly powered by 24 VDC ( $\pm 30\%$ ) via power rail or connectors.
- A 60 ms fast response time with simultaneous sensor error detection when selected.
- Selectable internal/external CJC.
- Excellent conversion accuracy in all available ranges, better than 0.05% of span.
- Meeting the NAMUR NE21 recommendations, the 3113 provides top measurement performance in harsh EMC environments.
- The device meets the NAMUR NE43 standard defining out of range and sensor error output values.
- A visible green LED indicates operational status of the unit and the input sensor.
- All terminals are protected against overvoltage and polarity error.
- High galvanic isolation of 2.5 kVAC.
- Excellent signal/noise ratio of  $> 60$  dB.


**Mounting / installation / programming**

- Selectable HART mode with HART 7 revision protocol enables extended device programming.
- Selectable DIP-mode for easy configuration of more than 1000 factory calibrated measurement ranges with HART read only feature.
- Selectable HART-mode to enable full HART read-write capability.
- The narrow 6.1 mm housing allows up to 165 units to be mounted per meter of DIN rail, without any air gap between units.
- Wide ambient temperature range of  $-25...+70^{\circ}\text{C}$ .

**Application**

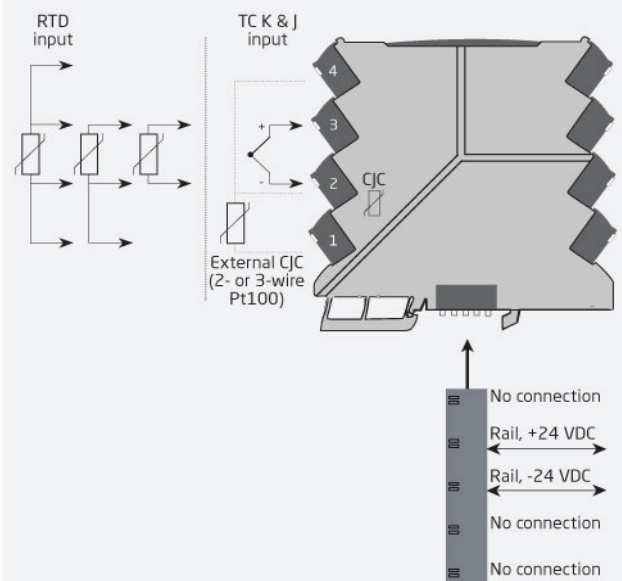

**Safe Area or Zone 2 & Cl. 1, Div. 2, gr. A-D**

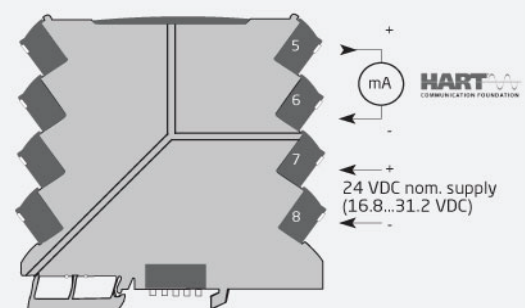

## Order

Type	Version
3113	With power rail connector / terminals : - Suooled via terminals : -N

Example : 3113-N

## Environmental Conditions

Operating temperature	: -25°C to +70°C
Storage temperature	: -40°C to +85°C
Calibration temperature	: 20...28°C
Relative humidity	: < 95% RH (non-cond.)
Protection degree	: IP20
Installation in	: Pollution degree 2 & meas. / overvoltage cat. II

## Mechanical specifications

Dimensions (HxWxD)	: 113 x 6.1 x 115 mm
Weight approx	: 70 g
DIN rail type	: DIN EN 60715/35 mm
Wire size	: 0.13...2.5 mm <sup>2</sup> / AWG 26...12 stranded wire
Screw terminal torque	: 0.5 Nm
Vibration	: IEC 60068-2-6
2...25 Hz	: ±1.6 mm
25...100 Hz	: ±4 g

## Common specifications

### Supply

Supply voltage	: 16.8...31.2 VDC
Max. required power	: 0.70 W
Max. power dissipation	: 0.70 W

### Isolation voltage

Isolation voltage, test / workin	: 2.5 kVAC / 55 VA (reinforced)
Zone 2 / Div. 2	: 250 VAC

### Response time

HART mode, (0...90%, 100...10%)	: 60 ms...60 s, programmable
DIP mode, (0...90%, 100...10%)	: < 60 ms
Accuracy	: Better than 0.05% of selected range
Signal / noise ratio	: Min. 60 dB
Long-term stability, better than	: ±0.1% of span / year (±0.3% of span / 5 years)
Programming	: DIP-switches
Signal dynamics, input	: 23 bit
Signal dynamics, output	: 18 bit
Accuracy	: Better than 0.05% of selected range
EMC immunity influence	: < ±0.5% of span
Extended EMC immunity: NAMUR NE21, A criterion, burst	: < ±1% of span
Incorrect DIP-switch setting identification	: 0 V / 0 mA output; LED 0.5 s / 1 Hz

## Input specifications

### RTD input

Temperature range, Pt100	: -200...+850°C
Min. measurement range (span)	: 10°C
Accuracy: the greater of	: Better than 0.05% of span or 0.1°C
Temperature coefficient: the greater of	: 0.02°C/°C or ≤ ±0.01%/°C
Sensor current	: < 150 µA
Sensor cable resistance	: < 50 Ω per wire
Effect of sensor cable resistance (3-/4-wire)	: < 0.002 Ω / Ω
Sensor error detection	: Yes - selectable via DIPswitch
Broken sensor detection	: > 800 Ω
Shorted sensor detection	: < 18 Ω

## Output specifications

### Common output specifications

Updating time	: 10 ms
---------------	---------

### Current output

Signal range	: 0...23 mA
Programmable signal ranges	: 0 / 4...20 mA
Sensor error indication (0...20 mA)	: 0 mA or 23 mA / OFF
Sensor error indication (4...20 mA)	: 3.5 mA or 23 mA / acc. to NAMUR NE43 or OFF
Load (@ current output)	: ≤ 600 Ω
Load stability	: ≤ 0.01% of span / 100 Ω
Current limitation @ low output load	: < 60 mA peak / < 4 mA average

### Voltage output

Programmable signal range	: 0/1...5 and 0/2...10 V
Sensor error indication	: 0 V / 10% above the max. / none
Open output	: < 18 V

### I.S. / Ex marking

ATEX	: II 3 G Ex ec IIC T4 Gc
IECEX.	: Ex ec IIC T4 Gc
FM, US	: Cl. I, Div. 2, Gp. A, B, C, D T4 or Cl. I, Zone 2, AEx nA IIC T4
FM, CA	: Cl. I, Div. 2, Gp. A, B, C, D T4 or Cl. I, Zone 2, Ex nA IIC T4
EAC Ex	: 2Ex nA IIC T4 Gc X

## Observed authority requirements

EMC	: 2014/30/EU & UK SI 2016/1091
LVD.	: 2014/35/EU & UK SI 2016/1101
ATEX	: 2014/34/EU & UK SI 2016/1107
RoHS	: 2011/65/EU & UK SI 2012/3032
EAC	: TR-CU 020/2011
EAC Ex	: TR-CU 012/2011

# CONVERTER TRANSMITTER PR3111



Data sheet PR3113 | Edition 2023

## Order

Type	Version
3113	With power rail connector / terminals : - Suoolied via terminals : -N

Example : 3113-N

## Approvals

ATEX	: KEMA 10ATEX0147 X
IECEX	: KEM 10.0068X
UKEX	: DEKRA 2IUKEK0055X
c FM us	: FMI7US0004X / FMI7CA0003X
c UL us, UL 61010-1	: E314307
DNV Marine	: TAA00001RW
EAC Ex	: RU C-DK.HA65.B.00355/19