



**2-wire HART 7 temperature transmitter**

**5437D**

- RTD, TC, potentiometer, linear resistance and bipolar mV input
- Single or true dual inputs with sensor redundancy and drift detection
- Wide ambient operating temperature of -50 to +85°C
- Total accuracy from 0.014%
- 2.5 kVAC galvanic isolation
- Full assessment to IEC61508 : 2010 up to SIL 2/3



**Application**


- Temperature measurement of a wide range of TC and RTD types.
- Conversion of wide span linear resistance and potentiometer inputs.
- Conversion of bipolar mV signals to 4...20 mA.
- Integration into asset management schemes.
- Critical applications requiring superior accuracy and/or sensor redundancy and drift detection.

**Technical characteristics**

- True dual input transmitter. High density 7-terminal design accepts the widest range of dual input combinations.
- Sensor redundancy - output automatically switches to secondary sensor in event of primary sensor failure, maintaining uptime.
- Sensor drift detection - alerts when sensor differential exceeds user-defined limits, for maintenance optimization.
- Dynamic variable mapping for process data in addition to the primary variable e.g. dual input features such as average, differential and min./max. tracking.
- Groundbreaking digital and analog signal accuracy over full input span and ambient conditions.
- Extensive sensor matching including Callendar Van Dusen and custom linearizations.
- Programmable input limits and runtime metering ensure maximum process traceability and sensor out of range protection.
- IEC 61508 : 2010 full assessment up to SIL 3 together with enhanced EMC Functional Safety testing to IEC 61236-3-1.
- 5437xxSx is suitable for the use in systems up to Performance Level "d" according to ISO-13849.
- Meets NAMUR NE21, NE43, NE44, NE89, NE95, NE130 and NE107 compliant diagnostics information.

**Mounting / installation**

- For DIN form B sensor head mounting. Configuration via standard HART communication interfaces or by PR 5909 Loop Link.
- The 5437D can be mounted in zone 0, 1, 2 and zone 21, 22 including MI / Class I, Division 1, Groups A, B, C, D.

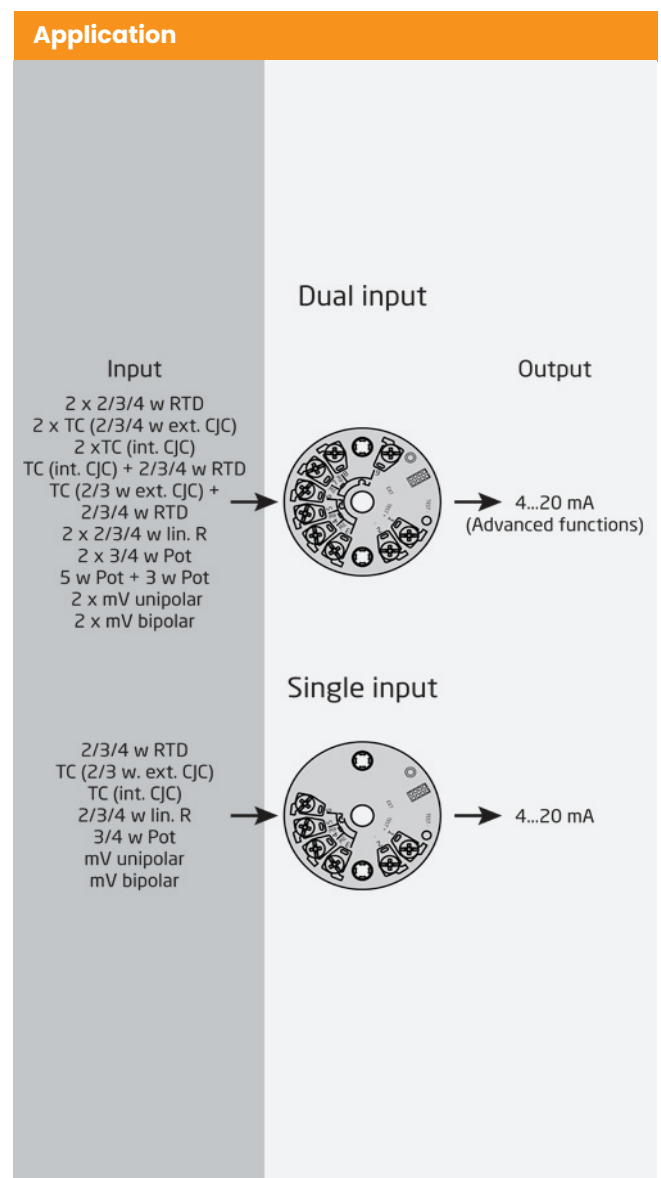

This page is automatically generated on the basis of information provided on www.prelectronics.com and affiliated websites. It is provided to you as a service and for information purpose only. While we have attempted to maintain the information as accurately as possible, the page may contain errors or omissions for which we disclaim any and all liability

**Order**

Type	Version	SIL approval	Marine approval
5437D	Single input (4 terminals) : 1 Dual input (7 terminals) : 1	SIL : S No SIL : -	Yes : M NO : -

**Environmental Conditions**

Operating temperature	: -50°C to +85°C (standard)
Operating temperature	: -40°C to +80°C (SIL)
Storage temperature	: -50°C to +85°C
Calibration temperature	: -23...25°C
Relative humidity	: < 95% RH (non-cond.)
Protection degree (encl./terminal)	: IP68 / IP00

**Mechanical specifications**

Dimensions	: Ø 44 x 21.45 mm
Center hole diameter	: Ø 6.35 mm / ¼ in
Weight approx	: 50 g
Wire size	: 1 x 1.5 mm <sup>2</sup> stranded wire
Screw terminal torque	: 0.4 Nm
Vibration	: IEC 60068-2-6
2...25 Hz	: ±1.6 mm
25...100 Hz	: ±4 g

**Common specifications**

**Supply**

Supply voltage	: 7.5*...30 VDC
Internal power dissipation	: ≤ 850 mW
Additional min. supply voltage when using test terminals	: 0.8 V
Min. load resistance at >37 V supply	: (Vsupply - 37) / 23 mA

**Isolation voltage**

Isolation voltage, test / workin	: 2.5 kVAC / 55 VAC
----------------------------------	---------------------

**Response time**

Response time (programmable)	: 70 ms
Programmable damping	: 0...60 s
Polarity protection	: All inputs and outputs
Warm-up time	: < 5 min.
Start-up time	: < 2.75 s
Programming	: Loop Link & HART
Write protection	: Jumper or software
Signal / noise ratio	: > 60 dB
Long-term stability, better than	: ±0.05% of span / year (±0.18% of span / 5 years)
Signal dynamics, input	: 24 bit
Signal dynamics, output	: 18 bit
Effect of supply voltage change	: < 0.005% of span / VDC
Accuracy.	: See manual for details
EMC immunity influence	: < ±0.1% of span
Extended EMC immunity	: NAMUR
NE21, A criterion, burst	: < ±1%

**Input specifications**

**RTD input**

RTD type	: Pt10...10000, Ni10...10000, Cu5...1000
Cable resistance per wire	: 5 Ω (max.)
Effect of sensor cable resistance (3-/4-wire).	: < 0.002 Ω / Ω
Sensor current	: < 0.15 mA
Sensor error detection	: None, Shorted, Broken, Shorted or Broken

**TC input**

Thermocouple type	: B, E, J, K, L, N, R, S, T, U, W3, W5, LR
Cold junction compensation (CJC)	: Constant, internal or external via a Pt100 or Ni100 sensor
Sensor error detection	: None, Shorted, Broken, Shorted or Broken

**Linear resistance input**

Measurement range / min. range (span)	: 0 Ω...100 kΩ / 25 Ω
Cable resistance per wire (max.)	: 50 Ω
Sensor current	: < 0.15 mA
Sensor error detection	: None, Broken

**Potentiometer input**

Potentiometer min...max.	: 10 Ω...100 kΩ
Measurement range / min. range (span)	: 0...100% / 10%
Cable resistance per wire (max.)	: 50 Ω
Sensor current	: < 0.15 mA
Sensor error detection	: None, Shorted, Broken, Shorted or Broken

**mV input**

Measurement range	: -800...+800 mV (bipolar)
Measurement range	: -100 to 1700 mV
Min. measurement range (span)	: 2.5 mV
Input resistance	: 10 MΩ
Sensor error detection	: None, Broken

**Output specifications**

**Common output specifications**

Normal range, programmable	: 3.8...20.5 / 20.5...3.8 mA
Extended range (output limits), programmable.	: 3.5...23 / 23...3.5 mA
Updating time	: 10 ms
Load (@ current output)	: ≤ (Vsupply - 7.5) / 0.023 [Ω]
Load stability	: < 0.01% of span / 100 Ω
Sensor error indication	: Programmable 3.5...23 mA
NAMUR NE 43 Upscale/Downscale	: > 21 mA / < 3.6 mA
HART protocol revisions	: HART 7 and HART 5

# TEMPERATURE TRANSMITTER PR5437A



Data sheet PR5437D | Edition 2023

## Order

Type	Version	SIL approval	Marine approval
5437A	Single input (4 terminals)	SIL : S	Yes : M
	Dual input (7 terminals)	No SIL :-	NO :-

## Observed authority requirements

EMC	: 2014/30/EU & UK SI 2016/1091
ATEX	: 2014/34/EU & UK SI 2016/1107
RoHS	: 2011/65/EU & UK SI 2012/3032
EAC	: TR-CU 020/2011
EAC Ex	: TR-CU 012/2011

## Approvals

ATEX	: DEKRA 16ATEX0047X
IECEX	: IECEX DEK. 16.0029X
CSA	: CSA 16.70066266
c FM us	: FM16US0287X / FM16CA0146X
INMETRO	: DEKRA 16.0008 X
NEPSI	: GYJ18.1054X
EAC Ex	: RU C-DK.GB.98.V.00192
EU RO MR Type Approval	: MRA0000023
SIL	: SIL 2 / SIL 3 certified & fully assessed acc. to IEC 61508

## NB

NAMUR NE95 report	: Please contact us
* / **	: See manual for details